



Model No: 590TP1120

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- ADA Compliant and meets Handicapped Accessibility Standard ICC/ ANSI A117.1 of less than 5 lbs. handle operating force.
- U.S. Patent #6, 826, 455.
- Verified compliant with 0.25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals)





NOTES:

Verified compliant with 0.25% weighted average Pb content regulations

Control Box(590TPxxx0) - Supplied as COMPLETE PRODUCT ONLY

Electronic Faucets

Deck mount electronic Proximity[™] lavatory faucet - cast hi-rise spout

SPECIFICATION:


- Deck mount electronic Proximity[™] Sensing lavatory faucet
- Deck mount electronic Proximity[™] lavatory faucet cast hi-rise spout
- Outlet#: 2 Vandal Res.1.5 GPM (5.7 L/Min) Laminar w/Agion® Antimicrobial
- Solenoid (forged brass) and Controller in Plastic Surface Mount Housing-REQUIRES SINGLE TEMPERED WATER SUPPLY
- Battery powered (4 AA Battery)
- · Cast Hi-Rise Spout-Single Hole Installation

OPERATION:

- · Hands free (touchless) operation.
- No visible sensor, the spout is the sensor.
- Water flows when sensing is activated.
- Water flow stops upon de-activiation of sensing.
- Auto shut-off feature. Factory set to 45 seconds. Will reset once obstruction is removed.
- Adjustable sensing distance 0 to 89 mm (0 to 3.5") factory set to 89 mm (3.5") (± 1/8")
- NOTE: For optimum performance of this product, we recommend a system
 pressure between 20 and 80 PSI static. This product will operate up to a
 maximum of 125 PSI static per ANSI and CSA requirements. However, we
 do not recommend pressures above 80 PSI. Thermal expansion or leaking
 pressure reducing valves may require use of expansion tanks or relief
 valves to ensure your system never exceeds its maximum intended
 pressure setting.
- Low battery audible beep (for battery models only) will activate after faucet shuts off when approximately 1500 cycles remain.

(Dimensional drawing on following page)



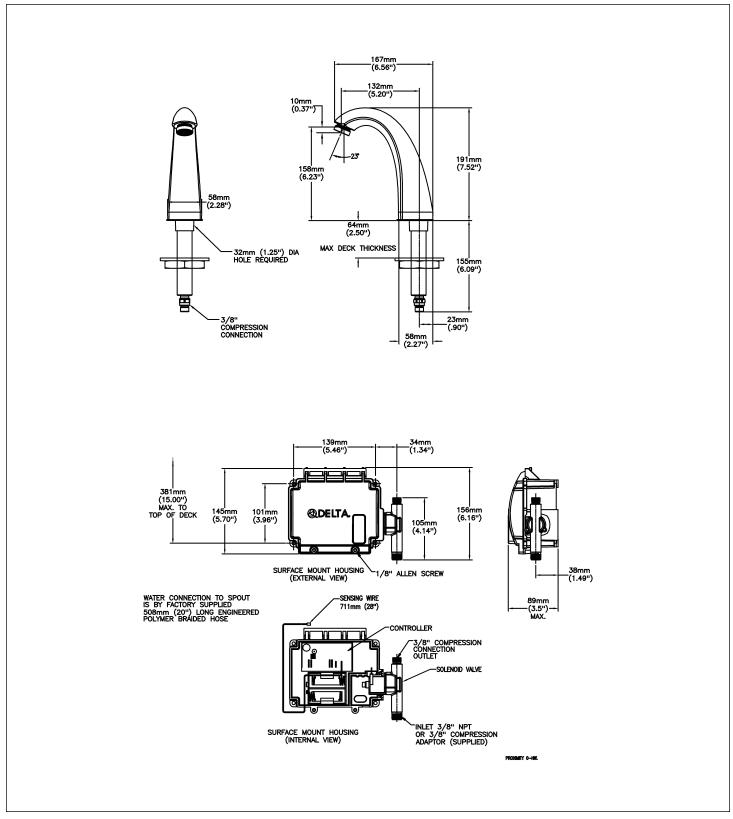

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced January 29, 2014.